


PARTS LIST

ARO PNEUMATIC LOGIC CONTROL
LOGIC FUNCTION ASSEMBLY
CIRCUIT SIDE PORTING BLOCK

MODEL 59019


FORM 4437

REV. 3/88

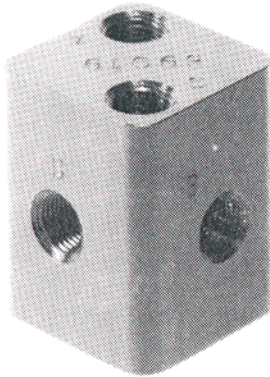

PIPE PORT 1/8-27 N.P.T.F.

CIRCUIT SYMBOL		
A		a
B		b
C		c

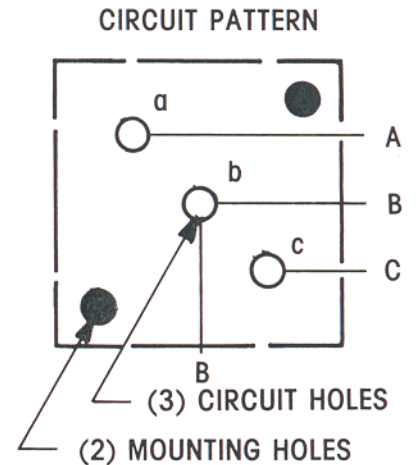

DESCRIPTION

The side porting block is used to make connections around the periphery of the circuit board. It provides one individual pipe tap connection on each of two sides, and two pipe tap connections on top. The pipe ports that are not used, must be plugged with Y227-2-K pipe plugs using a good grade pipe sealer. The porting block has three bottom ports which are marked on the top to correspond to their position on the base and also with pipe port markings on the sides. The bottom ports connect to the circuit board and through circuit passages in the circuit module allowing the required circuitry to be performed. Three 35926 seals provide sealing between the circuit base plate and the bottom ports of the porting block. Two Y154-33-K screws and two Y14-6-S washers are used to attach the porting block to the circuit board.

PARTS LIST

