

SALES & ENGINEERING DATA


529X-B TWO - BALL PUMP

RATIO
SERIES: **3:1**

FLUID P.S.I.
RANGE: **0 - 450**

RELEASED: 12-28-04
REVISED: 9-23-11
(REV. 02) S-1357

DIMENSIONAL DATA

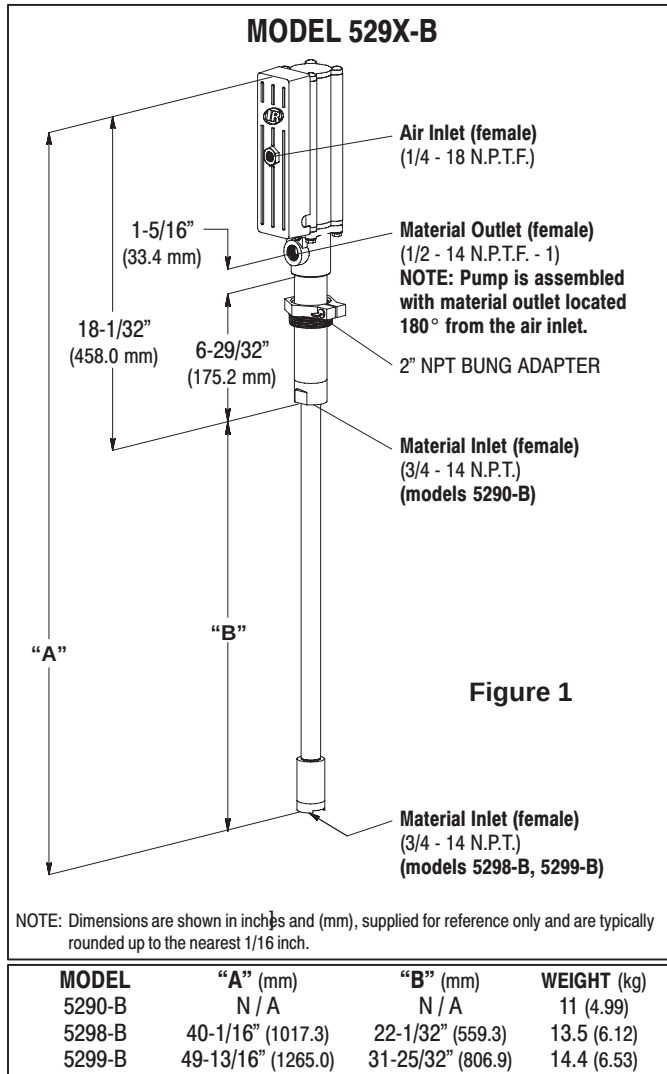

SPECIFICATIONS

CONSTRUCTION

Model Series	529X-B
Pump Type	Air Operated, Two-Ball, Double Acting Oil Pump
Ratio	3:1
Air Motor Diameter	2" (5.08 cm)
Stroke	3" (7.62 cm)
Air Inlet (female)	1/4 - 18 N.P.T.F.
Material Inlet (female)	3/4 - 14 N.P.T.
Material Outlet (female)	1/2 - 14 N.P.T.F. - 1
Pump Rebuild Kit	637387

MATERIALS OF CONSTRUCTION

Outlet Body	Steel
Cylinder	Aluminum
Plunger	Steel
Upper Packing	Polyurethane
Lower Packing	Nitrile
Upper Ball	Steel
Upper Seat	Steel
Lower Ball	Steel
Lower Seat	Steel

PERFORMANCE

Air Inlet Pressure Range	0 - 150 p.s.i. (0 - 10.3 bar)
Fluid Pressure Range	0 - 450 p.s.i. (0 - 31.0 bar)
Maximum Working Flow Rate	6 g.p.m. (23 l.p.m.)
Displacement In ³ Per Cycle	6.2
Cycles Per Gallon (Liter)	37 (9.8)
Noise Level @ 100 p.s.i.②	80 db(A)①

① Tested with 95086 muffler assembly installed.

② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

ACCESSORIES:

61113 Wall Mount Bracket
66073-1 Air Line Connection Kit

INGERSOLL RAND COMPANY LTD

209 NORTH MAIN STREET – BRYAN, OHIO 43506

① (800) 495-0276 • FAX(800) 892-6276
www.ingersollrandproducts.com

© 2011

CCN 15237472

ARO

IR Ingersoll Rand
Industrial Technologies

PERFORMANCE CURVES

