

SALES & ENGINEERING DATA


539X-B TWO - BALL PUMP

RATIO
SERIES: **5:1**

FLUID P.S.I.
RANGE: **0 - 750**

RELEASED: 12-27-04
REVISED: **9-13-11**
(REV. 02) S-1358

DIMENSIONAL DATA

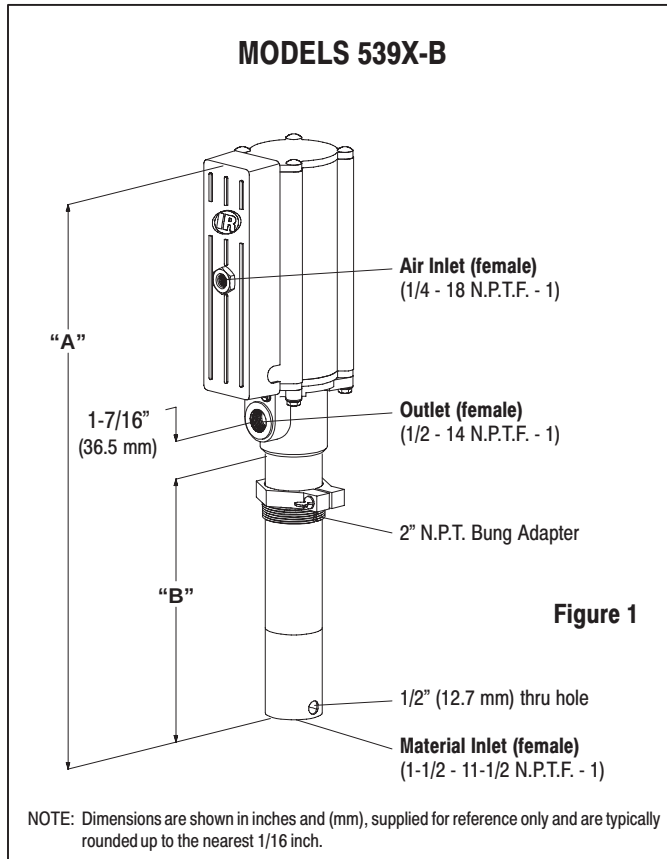

MODEL	"A" (mm)	"B" (mm)	WEIGHT (kg)
5390-B	21" (533.4)	9-3/4" (247.7)	15.75 (7.14)
5398-B	41-1/4" (1047.8)	30" (762)	24.3 (11.02)
5399-B	51" (1295.4)	39-3/4" (1009.7)	28.5 (12.93)

SPECIFICATIONS

CONSTRUCTION

Model Series	539X-B
Pump Type	Air Operated, Two-Ball, Double Acting Oil Pump
Ratio	5:1
Air Motor Diameter	3" (7.62 cm)
Stroke	3" (7.62 cm)
Air Inlet (female)	1/4 - 18 N.P.T.F. - 1
Material Inlet (female)	1-1/2 - 11-1/2 N.P.T.F. - 1
Material Outlet (female)	1/2 - 14 N.P.T.F. - 1
Pump Rebuild Kit	637384

MATERIALS OF CONSTRUCTION

Outlet Body	Steel
Cylinder	Aluminum
Plunger	Steel
Upper Packing	Polyurethane
Lower Packing	Polyurethane
Upper Seat	Steel
Lower Seat	Steel
Upper Ball	Steel
Lower Ball	Steel
Inlet Body	Steel

PERFORMANCE

Air Inlet Pressure Range	0 - 150 p.s.i. (0 - 10.3 bar)
Fluid Pressure Range	0 - 750 p.s.i. (0 - 51.7 bar)
Maximum Working Flow Rate	6 g.p.m. (34.1 l.p.m.)
Displacement / Cycle @ 100 p.s.i.	8.3 in. ³ (0.136 liters)
Cycles Per Gallon	28
Noise Level @ 100 p.s.i.②	85 db(A)①

① Tested with 95086 muffler installed.

② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

ACCESSORIES:

61113 Wall Mount Bracket
66073-1 Air Line Connection Kit

INGERSOLL RAND COMPANY LTD

209 NORTH MAIN STREET - BRYAN, OHIO 43506

① (800) 495-0276 • FAX(800) 892-6276

www.ingersollrandproducts.com

© 2011

CCN 15237506

ARO

IR Ingersoll Rand
Industrial Technologies

PERFORMANCE CURVES

