

SALES & ENGINEERING DATA

650132-C


DOUBLE ACTING PUMP

RATIO
SERIES: **2:1**

FLUID P.S.I.
RANGE: **0 - 300**

RELEASED: 11-6-98
REVISED: 5-27-10
(REV. C) S-960

DIMENSIONAL DATA

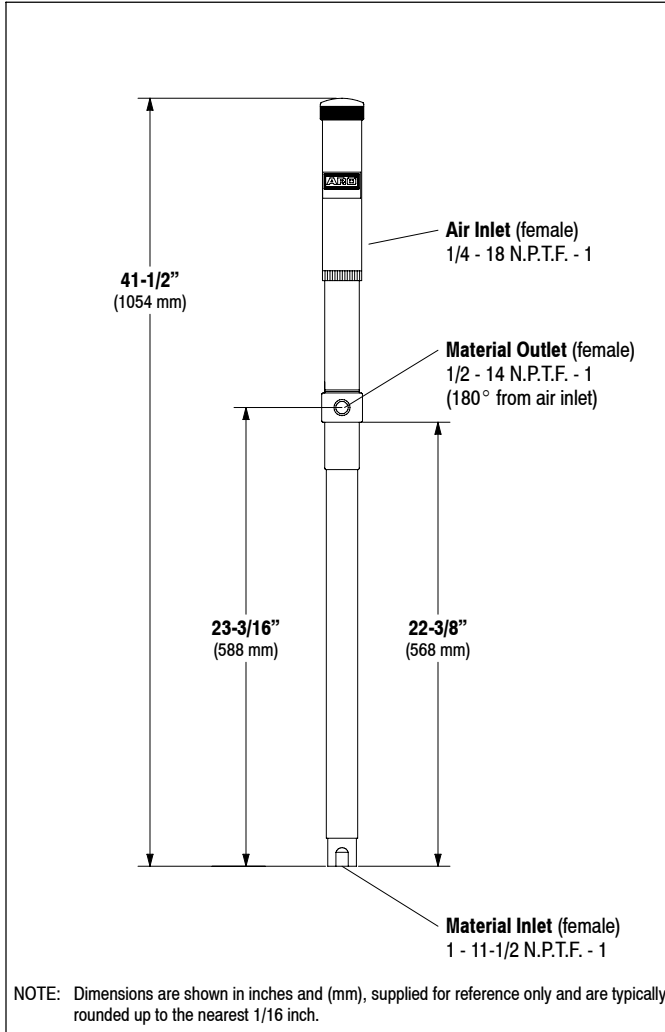

SPECIFICATIONS

CONSTRUCTION

Model Series (refer to option chart)	650132-C
Pump Type	Air Operated, Double Acting Pump
Ratio	2:1
Air Motor	60702
Motor Repair Kit	66098
Motor Diameter	2" (50.8 mm)
Stroke	6" (152.4 mm)
Air Inlet (female)	1/4 - 18 N.P.T.F. - 1
Lower Pump End Series	66283
Lower Pump Repair Kit	637044
Material Inlet (female)	1 - 11-1/2 N.P.T.F. - 1
Material Outlet (female)	1/2 - 14 N.P.T.F. - 1

MATERIALS OF CONSTRUCTION

Outlet Body	316 Stainless Steel
Cylinder	316 Stainless Steel
Plunger	316 Stainless Steel
Upper Packing	Ryton filled PTFE
Lower Packing	Mineral filled PTFE
Lower Ball	316 Stainless Steel
Lower Seat	316 Stainless Steel
Inlet Body	316 Stainless Steel
Weight	19 lbs (8.6 kgs)

PERFORMANCE

Air Inlet Pressure Range	0 - 150 p.s.i. (0 - 10.3 bar)
Fluid Pressure Range	0 - 300 p.s.i. (0 - 20.7 bar)
Maximum Rec'd Cycles / Minute	120
Displacement In ³ Per Cycle	8.0
Volume / Cycle	4.4 oz. (131 ml)
Cycles Per Gallon	28.9
Noise Level @ 90 p.s.i. - 40 c.p.m.	81 db(A) ^①

① The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1.13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

ACCESSORIES:

61113 Wall Mount Bracket

INGERSOLL RAND COMPANY LTD

209 NORTH MAIN STREET – BRYAN, OHIO 43506

① (800) 495-0276 • FAX(800) 892-6276
www.ingersollrandproducts.com

© 2010

CCN 15268675

ARO

IR Ingersoll Rand
Industrial Technologies

PERFORMANCE CURVES

