


EXTRUSION NOZZLES

RECOMMENDED FOR BODY SHOP AND STAMPING PLANT APPLICATIONS
WHEN MOTION IS LESS THAN 300 MM/SECOND







- (A) HEM-FLANGE ADHESIVE
1.5 TO 3.0 BEAD
- (B) OVER-HEM
1.5 HIGH X 5.0/8.0 WIDE BEAD
- (C) ANTI-FLUTTER - STITCH BEAD
6.0 TO 12.0 BEAD
- (D) WARM MELT
8.0 TO 15.0 BEAD

COLLAR
400-667

3/4-16 THREAD






USED WITH ALL
NOZZLES SHOWN
ON THIS PAGE

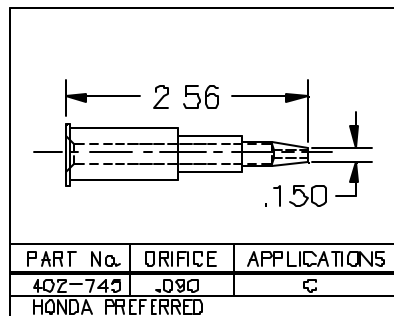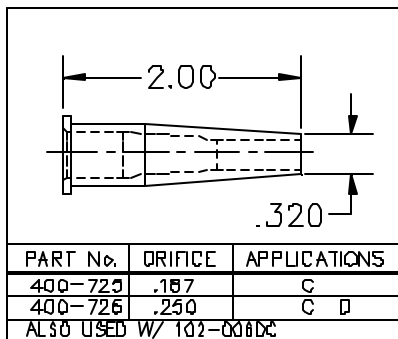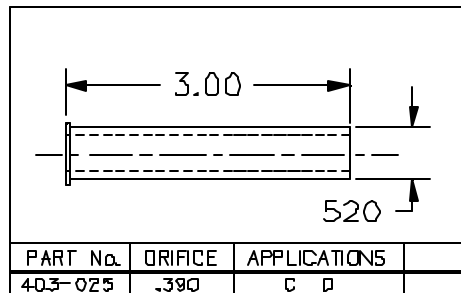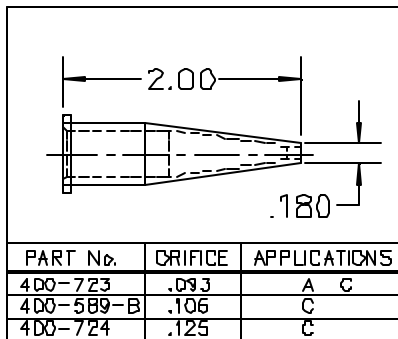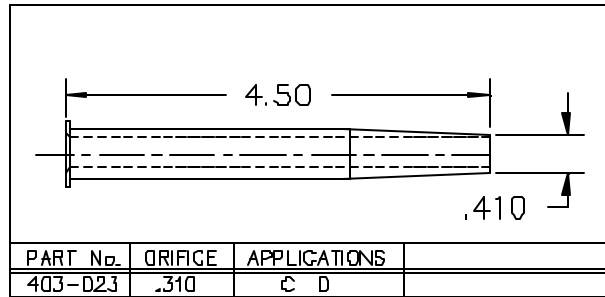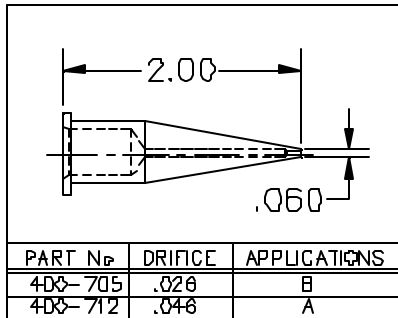

ANGLED NOZZLE ADAPTERS

SUITABLE FOR ALL STREAMING, SPRAY AND EXTRUSION APPLICATIONS



3/4-16 THREAD
MALE & FEMALE